


1. 10' X 70' AND 35' X 35' SIGHT TRIANGLES SHALL BE PROVIDED ON BOTH SIDES OF THE CONNECTING ROAD WHEN A MAIN ENTRANCE ROAD FOR A SUBDIVISION IS CONNECTED TO AN EXISTING ROAD IN ACCORDANCE WITH (A). THESE DIMENSION SHALL BE MEASURED FROM THE POINT OF INTERSECTION OF THE TWO RIGHT-OF-WAY LINES LONGITUDINALLY ALONG THE RIGHT-OF-WAY LINES
2. 35' X 35' SIGHT TRIANGLES SHALL BE PROVIDED ON ALL CORNERS OF AN INTERSECTION FOR ALL INTERIOR SUBDIVISION STREETS IN ACCORDANCE WITH (B). THESE DIMENSION SHALL BE MEASURED FROM THE POINT OF INTERSECTION OF THE TWO RIGHT-OF-WAY LINES LONGITUDINALLY ALONG THE RIGHT-OF-WAY LINES

②

3. NO TREES, PLANTS, SHRUBS OVER 2'6" HEIGHT IN SIGHT TRIANGLE, MEASURED FROM THE ADJACENT EDGE OF PAVEMENT

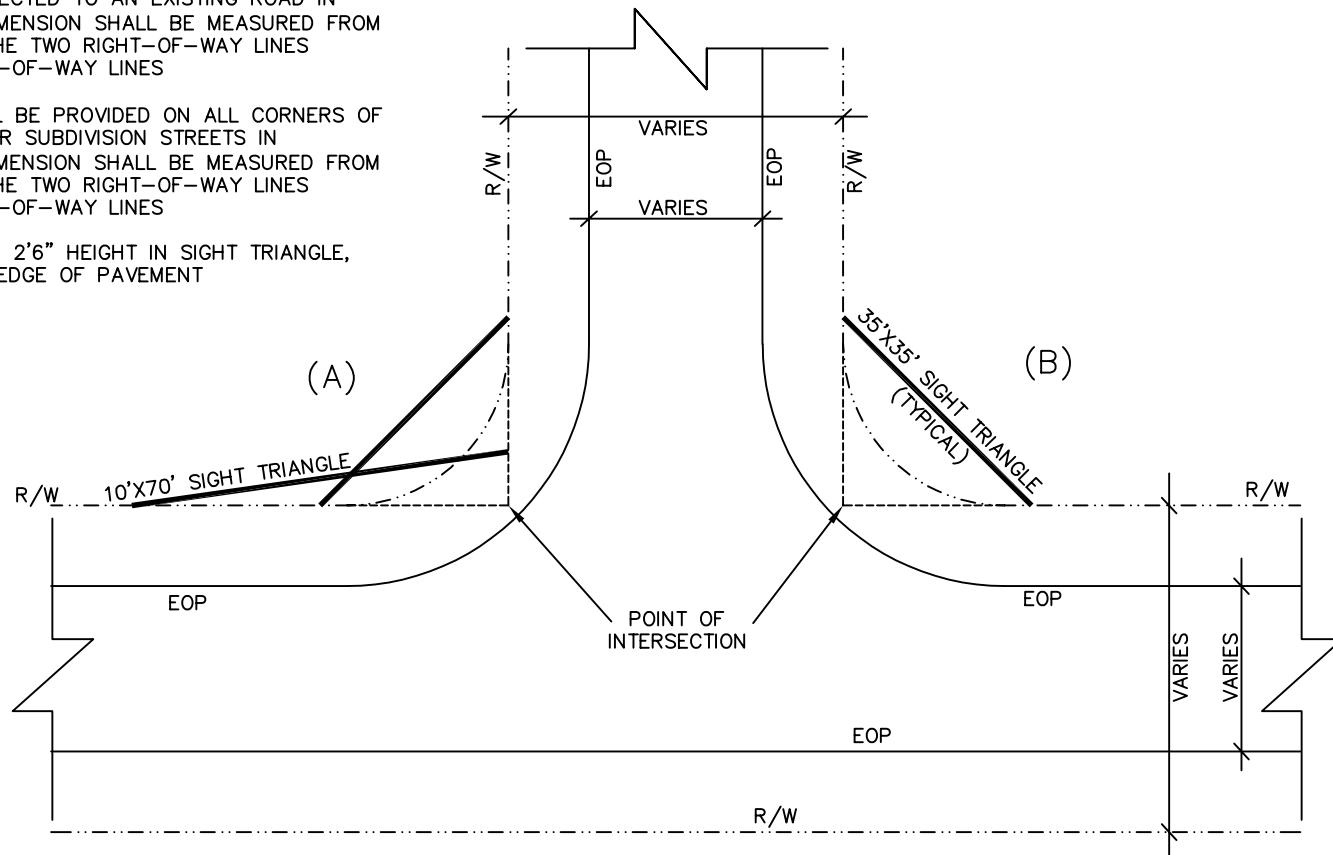

| REVISIONS | | |
|-----------|---------|----------------|
| NO. | DATE | DESCRIPTION |
| 1 | 05/08 | ADD NOTE #3 |
| 2 | 01/2015 | MODIFY NOTE #3 |
| | | |
| | | |



SIGHT TRIANGLES

FILE: I:/Maps-Details/Detail Manual/Details
DRAWN BY: JAM DATE: 08-07-01
CHECKED BY: JNL SCALE: N.T.S.
DETAIL 02.01.10