
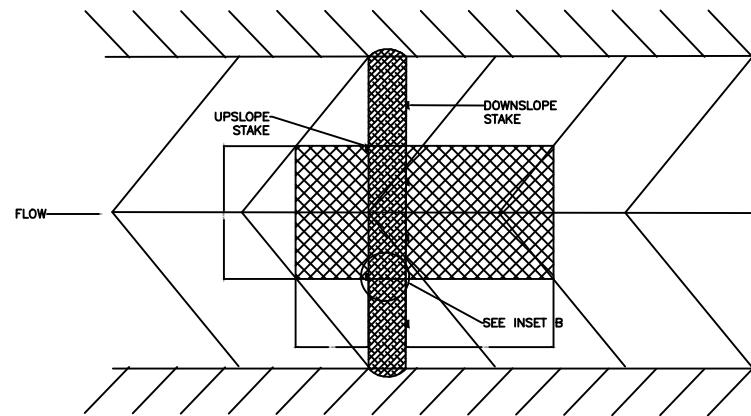
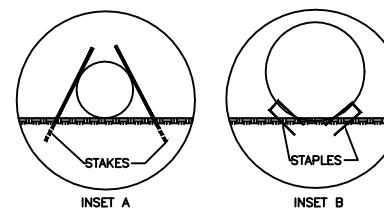


#### GENERAL NOTES:

1. USE MINIMUM 12 INCH DIAMETER FIBER WATTLE.
2. USE 2 FT. WOODEN STAKES WITH A 2 IN. X 2 IN. NOMINAL CROSS SECTION
3. ONLY INSTALL WATTLE(S) TO A HEIGHT IN DITCH SO FLOW WILL NOT WASH AROUND WATTLE AND SCOUR DITCH SLOPES AND AS DIRECTED.
4. INSTALL A MINIMUM OF 2 UPSLOPE STAKES AND 4 DOWNSLOPE STAKES AT AN ANGLE TO WEDGE WATTLE TO BOTTOM OF DITCH.
5. PROVIDE STAPLES MADE OF 0.125 IN. DIAMETER STEEL WIRE FORMED INTO A U SHAPE NOT LESS THAN 12" IN LENGTH.
6. INSTALL STAPLES APPROXIMATELY EVERY 1 LINEAR FOOT ON BOTH SIDES OF WATTLE AND AT EACH END TO SECURE IT TO THE SOIL.
7. INSTALL MATTING IN ACCORDANCE WITH SECTION 1631 OF THE NCDOT STANDARD SPECIFICATIONS.

#### ISOMETRIC VIEW

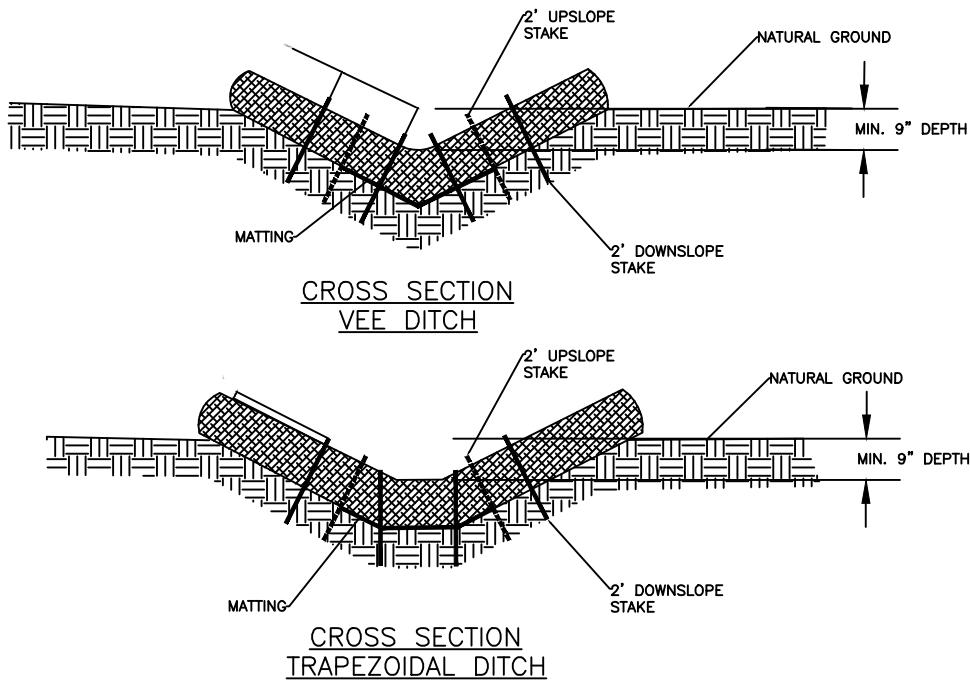

REVISIONS		
NO.	DATE	DESCRIPTION



#### TEMPORARY WATTLE CHECK DAM WITH MATTING

**CITY OF MONROE**  
UNION COUNTY  
NORTH CAROLINA  
PREPARED BY:  
ENGINEERING DEPARTMENT

FILE: I:/Maps-Details/Detail Manual/Details  
DRAWN BY: KMM DATE: 04/03/25  
CHECKED BY: SAM SCALE: N.T.S.  
**DETAIL 03.03.02**